

SCHLAGE

Rekeying Manual

For use with Keying Kits 40-132 & 40-134



STOP'EM WITH A SCHLAGE.®

Rekeying Is Easy With A SCHLAGE!

Since 1925, Schlage Lock has led the industry in quality, design and craftsmanship. Schlage locks fit any door, are easy to install and will not tarnish. Plus, every Schlage lock is easy to rekey. This book offers step by step instructions to rekeying your Schlage lockset or deadbolt.

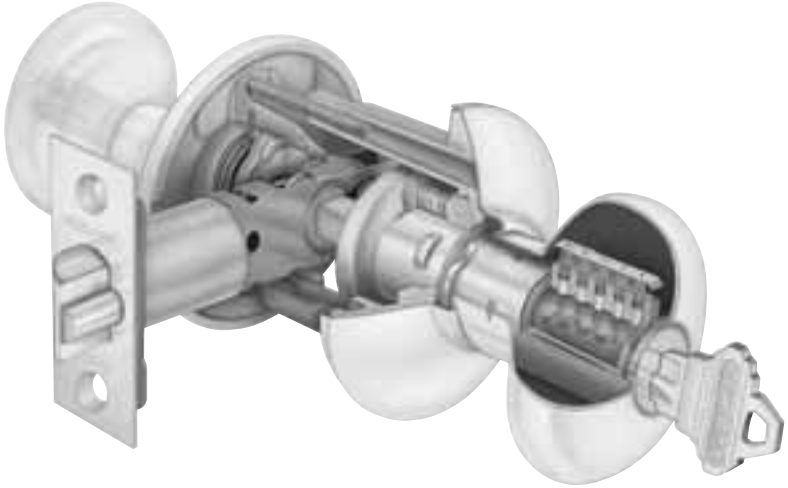


TABLE OF CONTENTS

Rekeying F-Series Compressible Cylinder Knobs and Levers	4 - 9
Rekeying A-Series, and Contractor Series Standard Usage Knobs	10 - 13
Rekeying S-Series and Contractor Series Heavy Usage Knobs	14 - 15
Rekeying B100, BC100 & BR200-Series Deadbolts	16 - 19
Rekeying B200-Series Deadbolts	20 - 23
Rekeying B300-Series Deadbolts	24 - 27
2 Using Key Gauge/Reinserting Disengaged Pins & Springs	28

SCHLAGE Keying Kits Provide Everything You Need To Get The Job Done!



Keying Kit 40-132 Includes everything you need to rekey the most popular Schlage knobs, levers and B-Series deadbolts. Includes bottom pins, top pins, springs, cylinder caps, cap pins, cap pin springs, B-Series deadbolt tailpieces, key gauge, plug follower and cap removal tool.



Keying Kit 40-134 Contains all of the basic materials to rekey most Schlage knobs and levers. Includes bottom pins, top pins, springs, cylinder caps, cap pins, key gauge and plug follower.

F-Series Compressible

STEP #1 - LOCK DIS-ASSEMBLY



Insert key into cylinder plug, rotate 90°.



Depress knob catch using tab on key gauge and pull knob off of knob catch.



Use your thumb and forefinger to apply pressure on the rose and pull knob/lever off spindle.



Rotate key back 90° to original position and remove key.



To remove the cylinder, first ensure that the keyway on the plug is facing upright. Next, allow the tail end of the cylinder to drop down slightly so that the top of the face of the cylinder sits in at an angle. The cylinder should not fall completely into the body of the knob (like picture E, not like picture F).

Cylinder Knobs and Levers

STEP #2 - CYLINDER REMOVAL



Carefully push the cylinder out of the back of the knob by applying pressure to the top of the cylinder plug face.



The cylinder will automatically compress and exit the rear of the knob through the shank of the knob.

Caution: To remove the cylinder through the rear of the knob, you will not need to use more than 5 pounds of force (or the amount of force required to push an elevator button). If you require more force, the cylinder is not aligned correctly for removal. Please refer to steps E and F for correct alignment.

F-Series Compressible

STEP #3 - CYLINDER REPINNING - METHOD 1

Schlage's compressible cylinders can be rekeyed using one of two methods:

Method 1: (recommended) The new compressible cylinders can be rekeyed in the exact same manner the F-Series cylinders have been rekeyed for decades. To rekey, simply remove the C-Clip from the back of the plug and use the plug follower to remove the plug from the body. The plug follower is also used to hold the top pins and springs in the body. The bottom pins in the plug can then be replaced - and the plug reinserted into the body. Finally, reattach the C-Clip onto the back of the plug.



Using U-Shaped portion of key gauge, press forward to remove C-Clip cylinder retaining ring



Keep the plug follower in the body to keep the top pins and springs from blowing. Dump the bottom pins from the plug. Insert & rotate the key 90° and insert the end of the plug follower into the rear of the cylinder housing - pushing the plug out the front of the housing.

Cylinder Knobs and Levers

STEP #3 - CYLINDER REPINNING - METHOD 1



D Load new bottom pins into the plug that correspond to the new key combination



E Re-insert the plug back into the housing and push the plug follower back out. Finally, re-insert the C-Clip cylinder retaining ring onto the back of the plug

STEP #3 - CYLINDER REPINNING - METHOD 2

Method 2: The new compressible cylinders can be rekeyed from the top of the cylinder by removing the stainless steel cap – and dumping the bottom pins, top T-Pins, and top springs from the cylinder. To rekey, simply insert new bottom pins into the holes on the top of the cylinder and then re-insert the top T-pins and springs on top of the bottom pins. Finally, attach a NEW stainless steel cap to the top of the cylinder body by aligning the holes in the top cap with the holes in the springs. Each spring should encircle each hole on the cap.



A Using a screwdriver or other small edge carefully pry off the steel cap from the top of the cylinder




B Dump contents from the top of the cylinder (springs, top pins and bottom pins)



F-Series Compressible

STEP #3 - CYLINDER REPINNING - METHOD 2

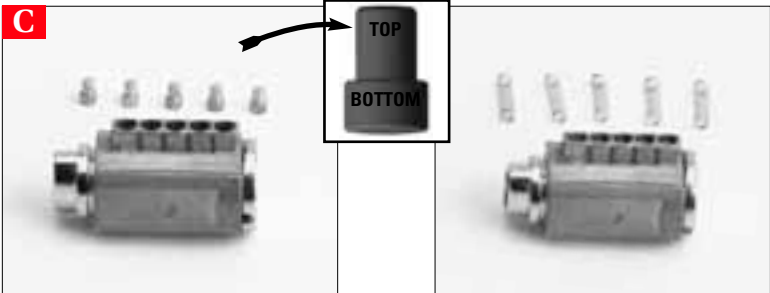

Align the holes in the plug with the holes in the housing. Load new bottom pins and re-load the top T-Pins (see inset for correct insertion direction). Re-load the springs over the top of the thin part of the top T-Pins.



Attach a ***NEW*** steel cap onto the top of the housing - aligning each spring with the hole in the cap. The teeth of the cap should also align with the grooves on the housing

Cylinder Knobs and Levers

STEP #4 - LOCK REASSEMBLY



Compress the cap and re-insert the cylinder into the shank of the knob (plug face first) aligning the cap with the slot in the sleeve inside the knob. With the cap aligned with the slot, push the cylinder the rest of the way into the knob



Insert key into cylinder plug, rotate 90°. Line up slot on the shank of the knob with catch on spindle and slide knob onto spindle



If necessary, depress knob catch and slide knob on until the catch pops into the slot on knob. Rotate key 90° and remove key

A-Series and Contractor

STEP #1 - REMOVE THE KNOB



Put key into cylinder (with teeth of key facing up) and turn key clockwise one quarter turn to three o'clock position.



Using tab on key gauge, depress knob retainer through hole in knob shank.



Use thumb and forefinger to apply pressure on rose and pull knob off spindle.

STEP #2 - REMOVE THE CYLINDER



Push cylinder forward until knob sleeve disengages from back of knob. Remove sleeve and set it aside.



Remove key from cylinder and remove cylinder from back of knob.

Series Standard Duty Knobs

STEP #3 - REMOVE THE CYLINDER RETAINING CLIP



Engage U-shaped portion of key gauge with "C" shaped clip on back of cylinder.



Press key gauge forward to disengage and remove clip.

STEP #4 - REMOVE THE CYLINDER PLUG



Insert key and turn clockwise to two o'clock position. Hold slotted end of follower against back of cylinder plug.



Hold follower firmly against plug and carefully slide it through cylinder shell until plug and front of follower have passed completely through cylinder shell.



Dump bottom pins from plug and remove old key. Discard old pins and keys.

IMPORTANT! Do not pull follower completely through cylinder...

Cylinder shell should end up near center of follower. Set these items aside, noting which end of shell is front end.

A-Series and Contractor

STEP #5 - LOAD NEW BOTTOM PINS



Use numbers on key bow or use key gauge (see page 22) to determine new key combination. Insert new key all the way until it stops against plug face.



Load new bottom pins (pointed end down) from keying kit that correspond to new key combination.

Important: Make sure all new pins are flush with top of plug, forming a perfect shear line. If any fall below or extend above shear line, replace with correct sizes.

STEP #6 - REINSERT THE CYLINDER PLUG



Engage back of plug in follower notch and turn slightly relative to cylinder shell. Gently push plug into shell, pushing follower out.



Reattach retaining clip to back of cylinder and snap into place.

Important: Key is still in plug at this point! Remove key only when "C" clip is snapped back into place.

Series Standard Duty Knobs

STEP #7 - REASSEMBLE THE KNOB




Align cylinder with opening on rear of knob and insert cylinder, keyway first.



Place sleeve onto rear of knob, align notched area of sleeve with knob opening, and press into place.

STEP #8 - REATTACH THE KNOB



Insert key into cylinder and turn it clockwise 1/4 turn to the three o'clock position. Align notch in attached sleeve with groove on spindle and slide knob toward spring-loaded knob retainer.



Depress retainer with tab on key gauge or other suitable tool and slide knob until retainer snaps into engagement.

Turn key back and forth to verify smooth operation and retainer engagement. A clicking sound indicates that you've done the job correctly.

S-Series Levers Heavy Usage

To rekey an F-Series Lever, S-Series lever or Contractor Series Heavy Usage lock,

S AND CONTRACTOR SERIES HEAVY USAGE LEVERS



Insert key and turn it clockwise 90° to three o'clock position.



Using tab on key gauge, depress retainer and remove knob or lever.



Remove key and remove cylinder. For S-Series locksets, notice sleeve around cylinder and remove sleeve.

NOTE: This sleeve is merely a spacer and does not affect the rekeying process.



When reassembling, slide cylinder back into lever, keyway first. Align button on chassis with hole in knob or lever shank and slide into place.

Reinsert key, turn it 90° to three o'clock position and press knob or lever back into place.

& Contractor Series Knobs and Levers

follow the steps on the preceding four pages, with the following differences.

CONTRACTOR SERIES HEAVY USAGE KNOBS



Insert key and turn it clockwise 90° to the three o'clock position.



Using tab on key gauge, depress knob retainer and remove knob



Remove key. Remove sleeve from back of knob and remove cylinder.



When reassembling, slide cylinder back into knob keyway first. Align knob retainer on chassis with hole in knob shank and slide knob into place.

Insert key, turn it 90° and depress knob retainer. Press knob back into place. Listen and feel for retainer to engage.

CONTRACTOR SERIES HEAVY USAGE/ORBIT KNOBS

After removing knob sleeve and cylinder, notice spacer surrounding cylinder. Remove spacer.

This spacer is necessary due to extra space inside Orbit knobs. Spacer does not affect the task of rekeying. To reassemble knob, simply slide spacer back onto cylinder, insert cylinder into knob and press sleeve onto back of knob.



Schlage B100/BC100/

STEP #1 - PREPARATION

B100/BC100



Remove cylinder assembly from its collar. Place cylinder face down on a smooth surface.

BR200



Remove the attached tailpiece from the back of the cylinder and place the housing face down on a smooth surface.

STEP #2 - REMOVE THE CYLINDER CAP

The photographs in this section depict B100 housings; however, the BC100 and BR200 Series cylinders rekey the same way.



Align scallops of cylinder cap with teeth on cylinder cap removal tool. Push tool down against slight spring pressure. Unscrew cap and remove it.




Remove cap, washer, pin and spring from back of cylinder plug and set aside.

NOTE: If cap removal tool is lost, use tab on key gage or other small tool to depress cap pin and unscrew cap with fingers.

BR200 Series Deadbolts

STEP #3 - REMOVE THE CYLINDER PLUG



Insert key and turn clockwise to two o'clock position. Place flat end with square notch of follower against back of plug.

IMPORTANT! Make sure follower notch is in horizontal (nine and three o'clock) position.



Holding follower firmly against back of plug, carefully push follower through cylinder shell. Support front of plug so it does not fall as it is pushed out. Cylinder shell should end up in center of follower. Set aside.

NOTE: If top pins and springs disengage from cylinder, see page 22.

STEP #4 - REMOVE BOTTOM PINS



Dump bottom pins from plug and remove old key. Discard old pins and keys.



Schlage B100/BC100/

STEP #5 - LOAD NEW BOTTOM PINS



Use numbers on key bow or use key gauge (see page 22) to determine new key combination. Insert new key all the way until it stops against plug face.



Load new bottom pins (pointed end down) into plug with pins from keying kit corresponding to new key combination.

IMPORTANT! All pins must be flush with top of plug, forming a perfect shear line. If any fall below or extend above shear line, replace with correct sizes.

STEP #6 - REINSERTING CYLINDER PLUG



Again, place flat end of follower against back of plug. Carefully push plug into shell, pushing follower out.



Insert key and place thumb against plug face. CAREFULLY pull key out, leaving plug locked in shell.

BR200 Series Deadbolts

STEP #7 - CYLINDER CAP REASSEMBLY



Place cylinder face down on a smooth surface. Insert cap pin spring and cap pin into small hole in back of plug.



Place washer on back of plug raised side up with notch around cap pin.



Screw cylinder cap back on with cap removal tool until cap is all the way on but *not tight*.

Test cylinder by inserting key, turning both directions, and removing it. If key turns hard or not at all, cap may be too tight. If key won't come out without pressing against plug face, cap is too loose. Adjust cap accordingly.

Schlage B200 Series Deadbolts

STEP #1 - PREPARATION



Remove cylinder assembly from rear of collar assembly.



Remove phillips head screw and remove cylinder from its housing.

STEP #2 - REMOVE PLUG RETAINER



To remove "C-Shaped" retainer, align tailpiece with half-round notch in key gauge (40-104) as shown. Push key gauge against C-clip until it pops off. Remove tailpiece.

Schlage B200 Series Deadbolts

STEP #3 - REMOVE THE CYLINDER PLUG



Insert key and turn clockwise to two o'clock position. Do not remove this plug.



To remove plug, use notched end of follower (as shown).



Align notched end of follower with cylinder plug.

NOTE: If top pins and springs disengage from cylinder, see page 22.



Caution: To avoid top pins springing out, push follower all the way through in one continuous careful motion. When completed, shell should be near center of follower.

STEP #4 - REMOVE BOTTOM PINS



Dump bottom pins from plug and remove old key. Discard old pins and keys.



Schlage B200 Series Deadbolts

STEP #5 - LOAD NEW BOTTOM PINS



Use numbers on key bow or use key gauge (see page 22) to determine new key combination. Insert new key all the way until it stops against plug face.



Load new bottom pins into plug with pins from keying kit to correspond with new key combination. Begin with pin chamber closest to key bow.

IMPORTANT! Make sure all pins are flush with top of plug, forming a perfect shear line. If any fall below or extend above shear line, replace with correct sizes.

STEP #6 - REINSERTING CYLINDER PLUG



Place notched end of follower against back of plug. Hold plug turned to the two o'clock position with the key inserted.



Carefully push plug into shell, pushing follower out into other hand. **DO NOT REMOVE KEY!**

Schlage B200 Series Deadbolts

STEP #7 - CYLINDER CAP REASSEMBLY



Reinstall C-shaped plug retainer and tailpiece. Remove key.

Be sure retainer does not block key slot on bottom of plug.



Place cylinder into its housing.



Secure cylinder in place with Phillips screw.

Schlage B300 Maximum


STEP #1 - PREPARATION



Remove adapter ring (For 1½" opening only). Place cylinder assembly face down on smooth surface.



Lift crank assembly and retainer over bumps with flat blade screwdriver and remove.



Remove black retainer and crank.

STEP #2 - REMOVE THE CYLINDER CAP



Engage teeth of cylinder cap removal tool with scallops in cylinder cap as shown. Push tool down against slight spring pressure and unscrew cap.



Remove cap, tailpiece, washer, cap pin and spring from back of plug and set aside.

NOTE: To remove tiny cap pin spring, turn cylinder assembly upside down and gently tap on table.

Security Deadbolt Series

STEP #3 - REMOVE CYLINDER PLUG



Insert key and turn clockwise to two o'clock position. Place flat end of follower against back of cylinder plug.



Caution: To avoid top pins springing out of cylinder shell, push follower all the way through in one careful, continuous motion. When completed, shell should be near center of follower.



Dump bottom pins from plug and remove old key. Discard old pins and keys.

NOTE: If the top pins and springs disengage, please see page 22.

STEP #4 - LOAD NEW BOTTOM PINS



Use numbers on key bow or use key gauge (see page 22) to determine new key combination. Insert new key all the way until it stops against plug face.



Load new bottom pins (pointed end down) into plug with pins from kit corresponding to new key combination.

IMPORTANT! Make sure that all pins are flush with top of plug, forming a perfect shear line. If any extend above or below the surface, replace with correct sizes.

Schlage B300 Maximum

STEP #5 - REINSERT PLUG



With plug turned slightly, place back of plug against flat end of follower and push follower out smoothly by pushing plug into shell.



Place thumb against plug face and carefully pull out key.

NOTE: Do not pull key out unless securely holding plug face with your thumb. This keeps plug in place.


STEP #6 - CYLINDER CAP REASSEMBLY



Place cylinder assembly on smooth surface. Insert cap pin spring, then cap pin into small hole in back of plug.



Place tailpiece with washer on top of plug. Be sure opening in washer straddles cap pin.



Position cylinder cap and screw into place with cylinder cap tool, but *not tight*. Cap pin should pop into one of the scallops in cap.


Test key by turning left and right, and removing it. If key is hard to turn, loosen cap one notch by turning counter clockwise. If key won't come out, tighten cap by turning clockwise. Repeat this test until operation is smooth.

Security Deadbolt Series

STEP #7 - REASSEMBLE CRANK ASSEMBLY



Place crank into retainer and slide onto tailpiece.

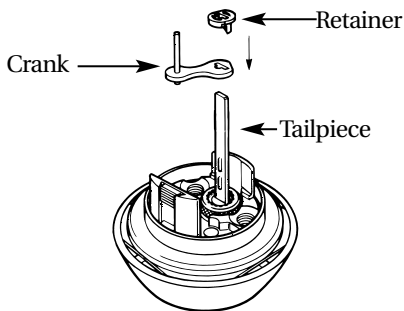

Push retainer and crank combination, onto tailpiece, until it stops against cylinder cap.



Replace adapter ring with the words facing you. (Leave this off if installing lock into 1½" diameter hole.)

To rekey inside cylinder of B362 Maximum Security deadbolts, simply repeat steps 2 through 7.



Using The Key Gauge To Determine Combinations



1. With key cuts facing up, slide key into opening of key gauge near number "0" and slide to first cut (notch) from key bow.
2. Slide key left until it stops on a number.
3. Write down number and proceed to next cut.
4. Repeat until all cuts have a corresponding number, from bow to tip of key. This five or six-digit number is the key combination or "bitting".

IMPORTANT: If the key lands between two numbers, pick the lower number (shallower cut).

If Top Pins and Springs Become Disengaged...



1. Insert square notched end of follower into cylinder shell from rear.
2. Install spring into back chamber and balance top pin (#3) on top of spring.
4. Using follower groove as a guide, push pin into its chamber against spring pressure with flat edge of tweezers or small flat blade screwdriver.
5. Slide follower forward to hold pin and spring in place.
6. Repeat until all chambers are loaded.

Glossary of Terms

ANSI	American National Standards Institute.
backset	The distance from the edge of door to the center line of prep.
bottom pin	A bullet-shaped tumbler that comes in a variety of lengths that correspond to the depths of the key cuts.
chassis	The body of the lock itself, without any trim.
cylinder	The portion of a lock comprised of the plug, shell, pins (tumblers) and springs. A properly cut key allows the plug to rotate the tailpiece or drive mechanism which unlocks the lock.
hand	The direction a door swings, always referenced from the outside.
housing	A larger portion of some cylinder assemblies which encases the cylinder (plug and shell).
latchbolt	A spring operated bolt with a beveled face to permit latching action when door closes.
master pin	A cylindrical shaped tumbler which is flat on both ends, placed between the top and bottom pin to create an additional shear line.
pin tumbler mechanism	Today's standard tumbler mechanism consists of a series of bottom pin, top pin and spring for each cut (notch) of the key.
pin tumblers	Small sliding pins in a lock cylinder that work against coil springs. They prevent the cylinder plug from rotating unless all are aligned simultaneously by cuts of the proper depths in the key.
plug	The portion of a cylinder which contains the keyway and which rotates with the key.
rose	A circular trim plate attached to the door under the knob or lever.
shear line	The area where the top surface of the cylinder plug and inside surface of the shell meet, and the height to which the bottom pins must be raised by the key in order to rotate the plug.
shell	The portion of the cylinder immediately surrounding the plug.
strike	The metal plate recessed in the frame that receives latch or bolt when the door is closed.
top pin	A cylindrical shaped tumbler which is flat on both ends and is installed directly under a coil spring in its chamber.
tailpiece	A usually flat actuator which extends from the back of the cylinder plug and engages in the lock to operate the latch or bolt.

NOTES

NOTES



Administrative Offices

111 Congressional Blvd, Suite 200
Carmel, IN 46032
(800) 847-1864

Customer Service

14505 West 100th Street
Lenexa, KS 66215

Order Processing

(800) 847-1864

Schlage Distribution Service Center

P.O. Box 2970
Shawnee Mission, KS 66201-1370
14505 West 100th Street
Lenexa, KS 66215
(800) 847-1864
(913) 541-8881
FAX (800) 365-5625

International Division

IR Security & Safety
1076 Lakeshore Road East
Mississauga, Ontario L5E 1E4
Canada
(877) 590-4734
(905) 403-1800
FAX (905) 270-1413



Visit Schlage on the web
www.schlagelock.com



IR Security & Safety

SCHLAGE
800-847-1864
800-452-0663 Fax
www.schlagelock.com